

70A Raton Drive Milford, CT 06461 (203) 876-0636






High Efficiency Condensing Boilers

Represented by Associated Boiler Line Equipment Co., Inc. (ABLE Company) 70A Raton Drive, Milford, CT 06461 203.876.0636 sales@ablecompany.com

])
	XL-3000	XL-4000	XL-5000	XL-5500	XL-6000
INPUT (btu/hr)	3,000,000	4,000,000	5,000,000	5,500,000	6,000,000
FUEL CONSUMPTION NG (ft ³ /hr)	3,000	4,000	5,000	5,500	6,000
FUEL CONSUMPTION #2 OIL (GPH)*	21.4	28.6	35.7	39.3	42.9
OUTPUT (btu/hr)	2,850,000	3,800,000	4,750,000	5,225,000	5,700,000
WATER CONTENT (gal)	502	502	483	483	483
DRY WEIGHT (lbs)	4075	4165	4340	4375	4475
OPERATING WEIGHT (lbs)	8260	8350	8365	8400	8500
WIDTH (in)	52	52	55	55	55
HEIGHT (in)	82.75	82.75	88.625	88.625	88.625
DEPTH (in)	104	104	104	104	104
STACK CONNECTION O.D. (in)	14	14	16	16	16
WATER INLET/OUTLET DIAMETER (in)	4	4	4	4	4
MIN CLEARANCE TO CEILING (in)	20	20	20	20	20
MIN SIDE CLEARANCE (in)	4	4	4	4	4
SYSTEM FILLING/DRAINAGE (in)	3/4 NPT				
BOILER CONDENSATION DRAIN (in)	1 NPT				

^{*} oil is used as an emergency backup fuel

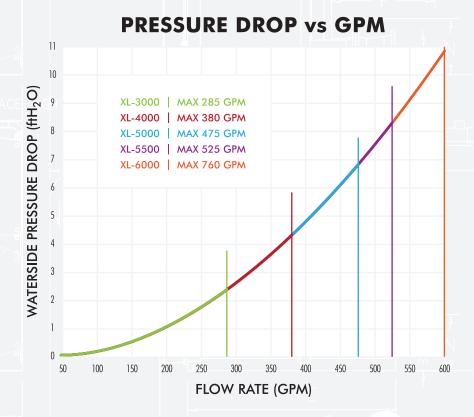

- + Sizes range from 3,000,000 - 6,000,000 btu/hr
- + High water volume w/ low waterside pressure drop reducing system pump HP
- + Twin water return for maximum efficiency
- + Heat exchanger made w/ 316Ti
- + Available w/ low and ultra low emissions on gas and #2 fuel oil
- + Simple to access and maintain

SuperiorBoiler.com



